


ELKATO

سوئیچ الکتو



EL-1SG0820GP-120W(V2)

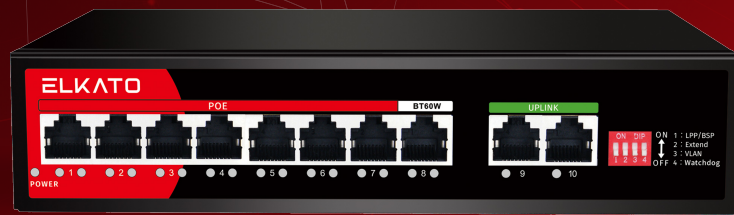

EL-1SG0820GP-120W(V2)	
Technical Specification	
Layer	Layer2
Managed	No
Switching Capacity	20 Gbps Full duplex
Packet Forwarding Rate	0.1488Mpps/port
MAC Table Size	2K
Network Protocol:	IEEE802.3i/802.3u/802.3x/802.3af/802.3at 802.3bt(8th Port)
LPP/BSP	YES
VLAN	YES
Extend (250M/10Mps)	YES
AI Watchdog	YES
Hardware Feature	
Power Supply Type	Bult-in
PoE	YES
Ethernet Port	8
Uplink Port	2
Optical Port	0
Ethernet Port Rate	1000Mps
Uplink Port	1000Mps
Optical Port Rate	N/A
Power Supply	240V AC
Operating Temperature	-10°C-50°C
Operating Humidity	10%-95% , non-condensing
Power Consumption	<5w
PoE Power Budget:	120W - 52V
PoE	
PoE Standard	IEEE802.3af, IEEE802.3at, Hi-PoE, IEEE802.3bt
PoE Budget	1-7 Port Max 30W Output, the 8th Port (Support BT) , Max 60W Output
General	
ESD	Air discharge:6kV Contact discharge: 6kV
Thunderproof	Common mode:6kV Differential mode: 6kV
Dimensions(L×W×H):	202*140*45 mm