


ELKATO

سوئیچ الکتو



EL-15GB0822GP-120W

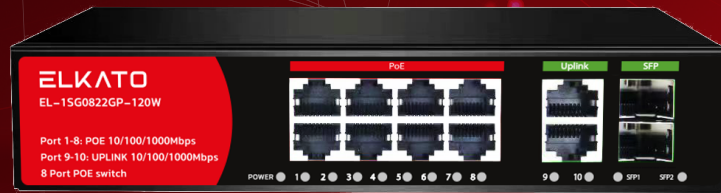

EL-1SGB0822GP-120W	
Technical Specification	
Layer	Layer2
Managed	No
Switching Capacity	20 Gbps Full duplex
Packet Forwarding Rate	1.488Mpps/port
MAC Table Size	8K
Network Protocol:	IEEE802.3i/802.3u/802.3x/802.3af
LPP/BSP	NO
VLAN	NO
Extend (250M/10Mps)	NO
AI Watchdog	YES
Hardware Feature	
Power Supply Type	Bult-in
PoE	YES
Ethernet Port	8
Uplink Port	2
Optical Port	2
Ethernet Port Rate	1000Mps
Uplink Port	1000Mps
Optical Port Rate	1000Mps
Power Supply	240V AC
Operating Temperature	-10°C-50°C
Operating Humidity	10%-95% , non-condensing
Power Consumption	<5w
PoE Power Budget:	120W - 52V
PoE	
PoE Standard	IEEE802.3af, IEEE802.3at
PoE Budget	8* 1000M PoE ports , Max. 30W Output of Single PoE Port & 2 1000M uplink ports +2 1000M SFP
General	
ESD	Air discharge: 1.5kV Contact discharge: 1.5kV
Thunderproof	Common mode: 2KV Differential mode: 1.5KV
Dimensions(L×W×H):	202*140*45mm (L*W*H)